


**PROGEF Standard Check valve type 561**  
**Without spring**  
**With socket fusion spigots metric**

**Model:**

- Material: PP-H
- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

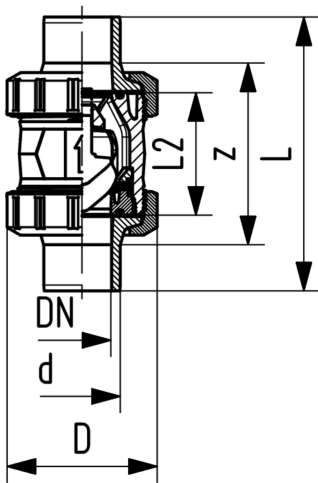

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ( $\Delta p=1$ bar) (L/min)	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
16	10	3/8	10	190	<b>167 561 041</b>	0.080	<b>167 561 051</b>	0.080
20	15	1/2	10	180	<b>167 561 042</b>	0.090	<b>167 561 052</b>	0.090
25	20	3/4	10	380	<b>167 561 043</b>	0.170	<b>167 561 053</b>	0.190
32	25	1	10	460	<b>167 561 044</b>	0.200	<b>167 561 054</b>	0.200
40	32	1 1/4	10	850	<b>167 561 045</b>	0.340	<b>167 561 055</b>	0.350
50	40	1 1/2	10	1080	<b>167 561 046</b>	0.510	<b>167 561 056</b>	0.510
63	50	2	10	1670	<b>167 561 047</b>	0.940	<b>167 561 057</b>	0.950
75	65	2 1/2	10	2950	<b>167 561 048</b>	2.360	<b>167 561 058</b>	2.370
90	80	3	10	3600	<b>167 561 049</b>	3.730	<b>167 561 059</b>	3.750
110	100	4	10	4150	<b>167 561 050</b>	5.960	<b>167 561 060</b>	5.980

d (mm)	D (mm)	L (mm)	L2 (mm)	closest inch (inch)
16	50	110	56	3/8
20	50	120	56	1/2
25	58	139	65	3/4
32	68	150	71	1
40	84	170	85	1 1/4
50	97	190	89	1 1/2
63	124	220	101	2
75	166	280	136	2 1/2
90	200	296	141	3
110	238	336	164	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>