


**PROGEF Standard Diaphragm valve DIASTAR Six
FC (Fail safe to close)
Unions with butt fusion spigots SDR11 metric**

Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- For easy installation and removal
- Short overall length

Option:

- Individual configuration of the valve

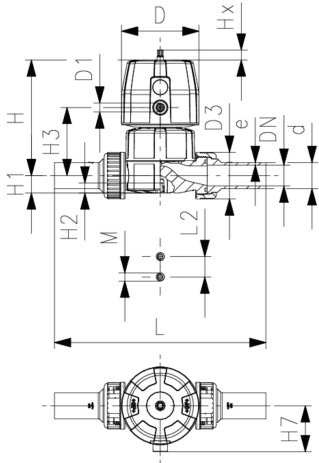

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
25	20	¾	6	271	167 614 113	0.871	800 047 262	1.760
32	25	1	6	481	167 614 114	1.589	800 047 263	2.610
40	32	1 ¼	6	759	167 614 115	1.805	800 047 259	3.760
50	40	1 ½	6	960	167 614 116	2.279	800 047 264	6.220
63	50	2	6	1181	167 614 117	3.421	800 047 265	7.800

d (mm)	D (mm)	D1_G (inch)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H7 (mm)	L (mm)	L2 (mm)	M	e (mm)	Lift = Hx (mm)	closest inch (inch)
25	96	¾	132	18	12	73	57	221	25	M6	2.3	10	¾
32	96	¾	143	22	12	84	57	234	25	M6	2.9	13	1
40	120	¾	173	26	15	99	69	260	45	M8	3.7	14	1 ¼
50	120	¾	193	32	15	119	69	284	45	M8	4.6	16	1 ½
63	120	¾	205	39	15	132	69	321	45	M8	5.8	16	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>