


TP Backing flange PVC-U metric



- (**) Special flange with bolt holes for DN 140
- **DN** indicates the nominal diameter of the PVC pipe
Bolt holes PN10
- Maximum medium- or ambient temperature 45°

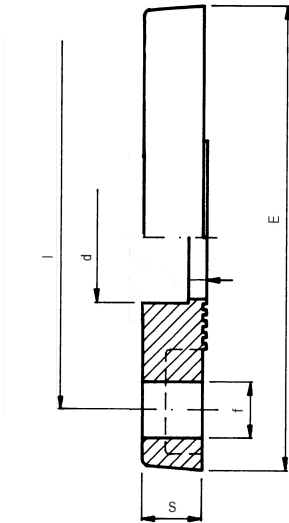

d (mm)	DN (mm)	PN (bar)	Code	SP	Weight (kg)	E (mm)	I (mm)	S (mm)	f (mm)
20	15	10	RV0FLI200	1	0.070	95	65	11	14
25	20	10	RV0FLI250	1	0.090	105	75	12	14
32	25	10	RV0FLI320	1	0.120	115	85	14	14
40	32	10	RV0FLI400	1	0.180	140	100	15	18
50	40	10	RV0FLI500	1	0.210	150	110	16	18
63	50	10	RV0FLI630	1	0.270	165	125	18	18
75	65	10	RV0FLI750	1	0.350	185	145	19	18
90	80	10	RV0FLI900	1	0.430	200	160	20	18
110	100	10	RV0FLI910	1	0.512	220	180	22	18
125	110	10	RV0FLI920	1	0.570	230	190	24	18
**	125	125	RV0FAI920	1	0.819	250	210	26	18
140	125	10	RV0FLI930	1	0.676	250	210	26	18
160	150	10	RV0FLI940	1	0.950	285	240	28	22
200	200	10	RV0FLI960	1	1.400	340	295	30	22
225	200	10	RV0FLI970	1	1.280	340	295	30	22
250	250	6	RV0FLI980	1	1.800	395	350	34	22
315	300	6	RV0FLI991	1	3.180	445	400	31	22

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>