




Check valve type 561 PVC-U
Without spring
With threaded sockets Rp

Model:

- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

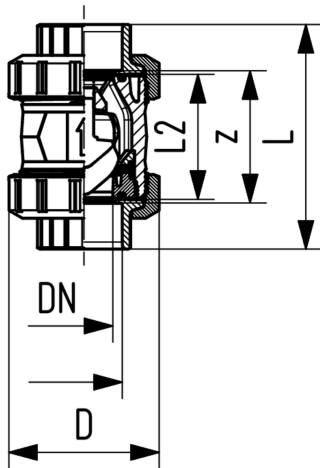

d (mm)	DN (mm)	Thread Type	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	EPDM Code	SP	Weight (kg)
16	10	Rp	3/8	10	190	161 561 021	1	0.130
20	15	Rp	1/2	10	180	161 561 022	1	0.130
25	20	Rp	3/4	10	380	161 561 023	1	0.260
32	25	Rp	1	10	460	161 561 024	1	0.300
40	32	Rp	1 1/4	10	850	161 561 025	1	0.510
50	40	Rp	1 1/2	10	1080	161 561 026	1	0.780
63	50	Rp	2	10	1670	161 561 027	1	1.390
75	65	Rp	2 1/2	10	2950	161 561 028	1	3.800
90	80	Rp	3	10	3600	161 561 029	1	5.160
110	100	Rp	4	10	4150	161 561 030	1	8.140

FKM Code	SP	Weight (kg)	D (mm)	L (mm)	L2 (mm)	z (mm)
161 561 031	1	0.130	50	95	56	69
161 561 032	1	0.130	50	100	56	67
161 561 033	1	0.280	58	114	65	78
161 561 034	1	0.300	68	127	71	85
161 561 035	1	0.520	84	146	85	100
161 561 036	1	0.790	97	152	89	106
161 561 037	1	1.400	124	177	101	121
161 561 038	1	3.820	166	233	136	144
161 561 039	1	5.180	200	254	141	151
161 561 040	1	8.180	238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>