




Check valve type 561 PVC-U
Without spring
With solvent cement spigots metric

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

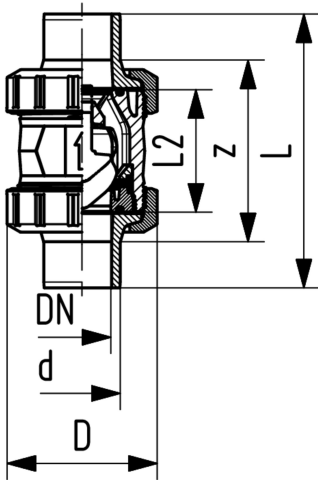

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
16	10	3/8	16	190	161 561 041	1	0.130	161 561 051	1	0.130
20	15	1/2	16	180	161 561 042	1	0.130	161 561 052	1	0.130
25	20	3/4	16	380	161 561 043	1	0.188	161 561 053	1	0.290
32	25	1	16	460	161 561 044	1	0.296	161 561 054	1	0.320
40	32	1 1/4	16	850	161 561 045	1	0.530	161 561 055	1	0.530
50	40	1 1/2	16	1080	161 561 046	1	0.762	161 561 056	1	0.810
63	50	2	16	1670	161 561 047	1	1.419	161 561 057	1	1.450
75	65	2 1/2	16	2950	161 561 048	1	3.370	161 561 058	1	3.380
90	80	3	16	3600	161 561 049	1	5.320	161 561 059	1	5.340
110	100	4	16	4150	161 561 050	1	8.500	161 561 060	1	8.540

d (mm)	D (mm)	L (mm)	L2 (mm)	closest inch (inch)
16	50	114	56	3/8
20	50	124	56	1/2
25	58	144	65	3/4
32	68	154	71	1
40	84	174	85	1 1/4
50	97	194	89	1 1/2
63	124	224	101	2
75	166	284	136	2 1/2
90	200	300	141	3
110	238	340	164	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>