





Ball valve type 546 Pro PVC-U
With lockable handle
With solvent cement sockets metric

Model:

- For easy installation and removal
- Ball seat PTFE
- Integrated stainless steel mounting inserts
- Lockable hand lever with ratchet settings
- Z-dimension, valve end and union nut **are compatible** with type 546 (1st Generation)

Option:

- Pneumatic or electric actuators from GF
- Individual configuration of the valve possible
- Multifunctional module with integrated limit switches (DN65-100)

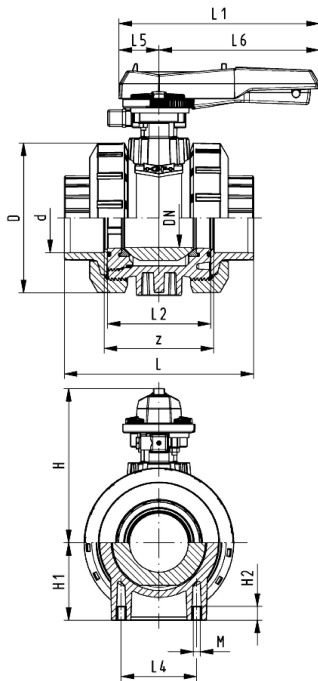

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
75	65	2 1/2	16	5000	161 546 088	1	5.200	161 546 098	1	5.200
90	80		16	7000	161 546 089	1	7.700	161 546 099	1	7.700
110	100		16	11000	161 546 090	1	12.000	161 546 100	1	12.000

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L1 (mm)	L2 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	M	z (mm)	closest inch (inch)
75	166	224	85	15	233	270	136	70	64	206	M8	144	2 1/2
90	200	235	105	15	254	270	141	70	64	206	M8	151	3
110	238	245	123	22	301	320	164	120	64	256	M12	174	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>